

Commercial Water Reverse Osmosis Systems

Capacity: 13,000 to 32,000 GPD


RO-300

SERIES

Pure Aqua's Reverse Osmosis systems are capable of removing salts as well as other impurities such as bacteria, sugars, proteins, dyes and constituents having a molecular weight greater than 150-250 dalton.



Pure Aqua supplies a full line of standard and fully customizable Reverse Osmosis systems, all of which are engineered using advanced 3D computer modeling and process design software for accurate and customized solutions.

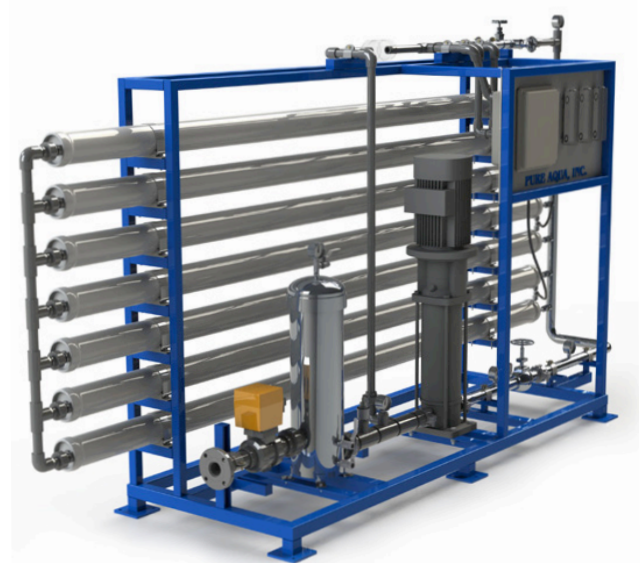

Computer generated 3D model of BW-32K-7340 with standard equipment.

Standard Features

- Powder coated carbon steel frame
- 4" TFC spiral wound membranes
- Stainless steel multi-stage pump
- with TEFC motor
- FRP membrane housing
- 5 micron cartridge prefilter
- 460V/3Ph/60Hz power supply
- Microprocessor based control panel
- Programmable time delay and set points
- Status indicators
- Motor starter
- NEMA 12 enclosure
- Low pressure switch
- High pressure switch
- Liquid filled pressure gauges
- Permeate conductivity monitor
- Permeate & concentrate flow meters

Available Options


- Feed water conductivity monitor
- Membrane cleaning skid
- Automatic hourly flush
- Feed / Permeate blending
- Export crating
- 380-415V/3Ph/50Hz power supply
- 220V/3Ph/60Hz power supply
- Product tank level controller switch
- Feed pH monitor with sensor
- Feed ORP monitor with sensor
- Water and hour meters
- Chemical dosing systems
- Media and Iron prefiltration systems
- Ozonation and UV sterilization systems
- Water softeners
- Post deionization polishers
- Pre piped skid system

Commercial Water Reverse Osmosis Systems

Capacity: 13,000 to 32,000 GPD

RO-300
SERIES

The spiral membrane is constructed from one or more membrane envelopes wound around a perforated central tube. The permeate passes through the membrane into the envelope and spirals inward to the central tube for collection. The layers of the membrane envelope are detailed in the diagram to the right.

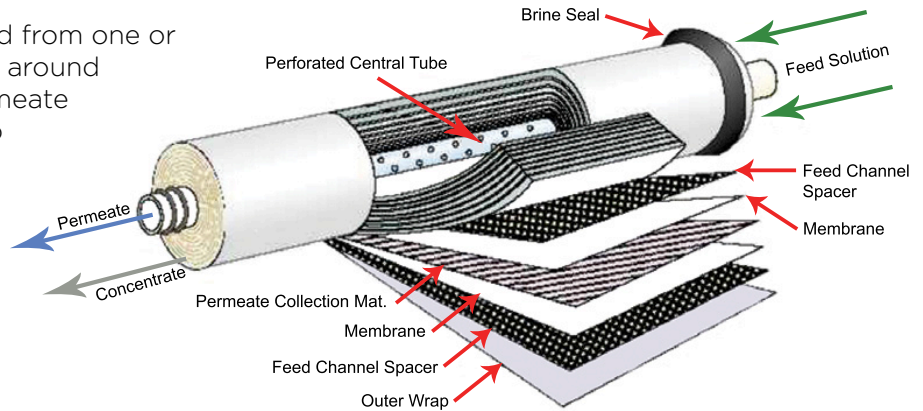

Operation Specifications

- Max. feed water temperature: 42°C
- Feed water pressure: 20 to 80 psi
- Operating pressure: 150 to 250 psi
- Hydrogen Sulfide must be removed
- Turbidity should be removed
- Max. Iron content: 0.05 ppm
- Feed water TDS: 0-1,000 ppm
- Equipment upgrade for TDS over 5,000 ppm
- Hardness over 1 GPG requires antiscalant dosing
- pH tolerance range: 3-11
- Max. Silica Tolerance: 60 ppm @ 60% recovery
- Operate at higher TDS by lowering recovery

Model #	Permeate		Quantity of Membranes	Motor HP at 1,000 ppm		Approx. Weight (lbs)	Dimensions L"xW"xH"
	GPD	M ³ /D		60 Hz	50 Hz		
TW-13K-3340	13,200	50	9	3	3	750	136x43x60
TW-15K-5240	15,000	57	10	3	3	850	96x43x60
TW-18K-4340	18,000	68	12	5	5	875	136x43x60
TW-22K-5340	22,500	85	15	5	5	900	136x43x60
TW-24K-8240	24,000	91	16	5	7.5	950	96x43x68
TW-27K-6340	27,000	102	18	5	7.5	990	136x43x68
TW-32K-7340	32,000	121	21	7.5	7.5	1025	136x43x68

Note: If the feed water TDS exceeds 1,000 ppm, the system model number changes to BW-XXK-XXXX, and a suffix is added to the end of the model number: "-3" is added if the TDS is 3,000 ppm or less, and "-5" is added if the TDS is 5,000 ppm or less. Example: Required system to produce 27,000 GPD with a feed water TDS of 5,000 ppm, the corresponding model number is: "BW-27K-6340-5".

Pure Aqua also supplies: Custom Engineered Solutions, Multimedia Pretreatment, Activated Carbon Pretreatment, Water Conditioning, Chemical Dosing Systems, Ultraviolet (UV) Sterilizers and Ozonation Systems.

 <p>Pure Aqua, Inc.® Water Treatment and Reverse Osmosis Systems sales@pureaqua.com Tel: +1-714-432-9996 www.pureaqua.com Fax: +1-714-432-9898</p>	  	<p>Authorized Dealer:</p>
--	---	---------------------------